

macnaught

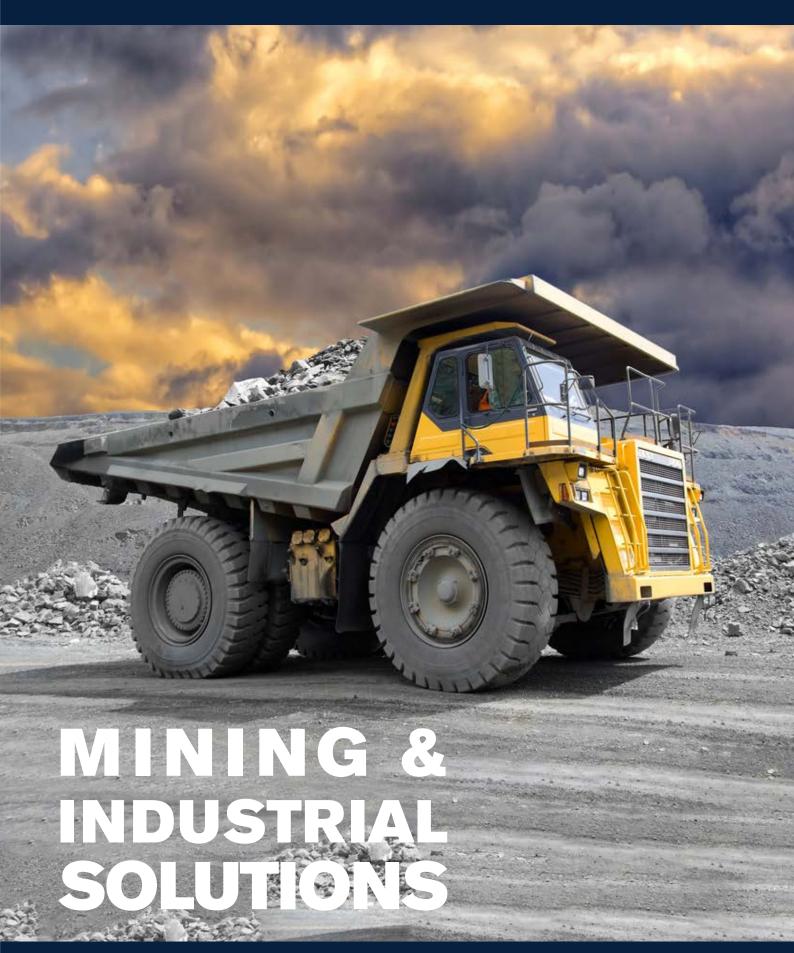



FLEXIGUN®

450G GREASE GUN UNDERGROUND MINING

K29-01-11

- Delivery pressure up to 68,900 kPa (10,000 psi)
- Up to 0.68g per shot
- Maximum viscosity: Up to NLGI 2
- Supplied with 300mm flexible extension and KY Supergrip Coupler
- Zinc construction suitable for use underground

POWERGUN



LEVERGUN®

450G LEVER GUN UNDERGROUND MINING

K45-01-11

- Delivery pressure up to 82,750 kPa (12,000 psi)
- Up to 1.5g per shot
- Maximum viscosity: Up to NLGI 2
- Supplied with 150mm steel extension and KY Supergrip Coupler
- Zinc construction suitable for use underground



AIR OPERATED DUAL ACTION GREASE GUN 450G

K57-01

- Delivery pressure up to 6000 psi
- Continuous Delivery: Up to 400 g/min
- Single shot up to 0.9g

QUICKER **EASIER** SAFER





GREASE COUPLER

KYPLUS-01 1/8" BSP Thread KYPLUS-02 1/8" NPT Thread KYPLUS-03 M10X1 Metric Thread







- Patent approved smart release mechanism enables effortless one handed release & pull
- Delivery pressure up to 68,900 kPa (10,000 psi)



- Dispense up to 12x grease cartridges per charge free flow
- Supplied with 2x18V 3.0Ah Lithiumion Rechargeable Battery Packs and Charger
- Supplied with 1m long flexible extension and KY Supergrip Coupler



P3 GREASING **SYSTEM - 20KG**

BUILT

OUGH

P3-01C

- 50:1 Ratio Pump
- KY Supergrip coupler
- 360° ZSB high pressure
- Supplied with Pump, lid, follower, 4m high pressure grease hose and B2 Booster
- Also suitable for underground



P8 POWERLUBE™ 180KG GREASE KIT

- Grease pump kit (50:1)
- Supplied with Pump, lid, follower, 2.5m grease hose and B2 Booster gun
- Also suitable for underground



P8 POWERLUBE™ **180KG GREASE KIT WITH TROLLEY**

P8-11TROLLEY

- P8-11 Grease Pump kit (50:1) ratio
- B2 booster gun
- TR205 180kg Trolley
- B2 gun included



P58 MAXILUBE **AIR OPERATED GREASE PUMP WITH GUN, LID & FOLLOWER** P58PGLF-01

- Delivery pressure up to 59,900 kPa (8700 psi)
- Maximum viscosity: Up to NLGI 2
- Supplied with 58:1 ratio grease pump, lid, follower, 2.5m grease hose and B2 Booster gun



MINILUBE[®] **MANUAL GREASING SYSTEM**

K7-01

- Provides up to 30 shots of grease with each prime
- Maximum viscosity: Up to NLGI 2
- Suitable for 2.5kg containers
- Delivers up to 10,000psi on high pressure setting



BOOSTER GUN ASSY - COMPLETE WITH Z SWIVEL

B2-01

- Used for high pressure delivery with any airpowered grease pump
- 1/4" NPT (F) inlet
- 360° ZSB high pressure swivel
- Also suitable for underground









POLY DIESEL TANKS

- Heavy duty tank construction
- Premium quality 12v pumps manufactured in Italy
- Lockable lid for security
- Automatic nozzle
- Suitable for Diesel use ONLY

AVAILABLE IN THE FOLLOWING MODELS:

MDT100L MDT200L MDT300L MDT400L MDTN400L MDT600L MDT800L **MDT1000L MDT1200L**



240V DIESEL **MINI BOWSER**

AMB100L

- Suitable for Diesel use ONLY
- Flow rate up to 100 L/min
- Inlet/Outlet: 1" BSP (F)
- Supplied with 4m long delivery hose and automatic





- 1" BSP (F) inlet
- 30mm O.D. spout
- Up to 120 L/min flow rate, depending on installation
- Not suitable for gravity applications



HI-FLOW AUTO FUEL NOZZLE

L-ANHF180

- 1 1/4" BSP (F) inlet
- 32mm O.D. spout
- Up to 180 L/min flow rate, depending on installation
- Not suitable for gravity applications
- Suitable for Diesel only





lubemate

MECHANICAL FUEL METER DM100-01

- Operating pressure up to 345 kPa (50 psi)
- Accuracy around +/- 1.0% of reading
- Suitable for Diesel, ULP, Kerosene and light oils
- Flow range between 3 80L/min



AIR OPERATED DIAPHRAGM **PUMP - 1/2"**

DDP13

- Maximum Air Pressure: 690 kPa (100 psi)
- Maximum Flow Rate: 42 L/min (viscosity dependant)
- Suitable for oils (new & used), Engine Coolants RTU (new & used), oily water and Diesel
- Not for use with chemicals





AIR OPERATED DIAPHRAGM **PUMP - 3/4"**

DDP19

- Maximum Air Pressure: 690 kPa (100 psi)
- Maximum Flow Rate: 45 L/min (viscosity dependant)
- Suitable for oils (new & used), Engine Coolants RTU (new & used), oily water and Diesel
- Not for use with chemicals



AIR OPERATED DIAPHRAGM **PUMP - 1" DDP25**

- Maximum Air Pressure: 690 kPa (100 psi)
- Maximum Flow Rate: 174 L/min (viscosity dependant)
- Suitable for oils (new & used), Engine Coolants RTU (new & used), oily water and Diesel
- Not for use with chemicals



AIR OPERATED DIAPHRAGM PUMP - 1 1/2"

DDP38

- Maximum Air Pressure: 690 kPa (100 psi)
- Maximum Flow Rate: 265 L/min (viscosity dependant)
- Suitable for oils (new & used), Engine Coolants RTU (new & used), oily water and
- Not for use with chemicals





AIR OPERATED DIAPHRAGM PUMP - 2"

DDP50

- Maximum Air Pressure: 690 kPa (100 psi)
- Maximum Flow Rate: 598 L/min (viscosity dependant)
- Suitable for oils (new & used), Engine Coolants RTU (new & used), oily water and
- Not for use with chemicals



OIL CONTROL GUN PRESET DIGITAL DISPLAY

HG60-01

- Accuracy of +/- 0.5% (lube oils)
- Pre-settable to 99.9 L auto shut-off
- 5-digit resettable batch totaliser
- 6-digit accumulative totaliser
- Flow Range: 1 30L/min



OIL CONTROL GUN. **RIGID EXTENSION**

HG20R-01

- Max pressure up to 6,900 kPa (1,000 psi)
- Flow rate up to 30 L/min
- 1/2" BSPT inlet
- Automatic non-drip nozzle



HIGH FLOW OIL CONTROL **GUN**

HG100-019E-01

- HG100 High volume gun with digital IM019E oil meter for accurately measuring bulk fluid deliveries
- Flow rate 3-57 L/min
- Manual non-drip nozzle



OIL CONTROL GUN HIGH VOLUME

HG100-01

- High volume gun suited to bulk dispensing of most types of service fluids used in mining or large workshops
- Max pressure up to 10,350 kPa (1500 psi)
- Flow rate up to 57 L/min
- Manual non-drip nozzle



RELIABLE HG20 OIL CONTROL & MECHANICAL OVAL GEAR METER

OIL CONTROL GUN WITH MECHANICAL METER

HG20F-012KMM-01

- Trigger guard to avoid accidental dispensing of fluid
- Flow Range: 1-30L/min
- Maximum Pressure: 1000psi
- 1/2"BSPT Inlet



MULTI-PURPOSE GEAR OIL PUMP, UNDERGROUND MINING C7Z-01

- Zinc construction suitable for use underground
- Wetted components Zinc, steel, viton and delrin
- · Compatible fluids kerosene, two stroke mix, lubricating oils up to SAE140



IBC MOUNTED OIL DISPENSING SYSTEM WITH 5:1 R-SERIES PUMP AND METERED GUN

OS950GE-01

- Solid hot-dip galvanised base frame
- R500S-01 heavy-duty air-operated oil pump
- HG20F-012E-01 metered oil control gun & holster
- MOTP 12 x 15m Oil Reel





OIL DISPENSING SYSTEM 3:1 -R-SERIES PUMP, **METERED GUN** OS100GE-01

- TR205 drum trolley
- HG20R-012E-01 metered oil control gun
- OMP415B Retracta oil reel
- R300S-01 air-operated oil pump

RETRACTA ##



F-SERIES OIL REELS FHO1215-01 1/2" X 15M FHO1915-01 3/4" X 15M

- Strong heavy duty twin pedestal construction
- FHO1215-01 Pressure Rating 2,000 psi
- FHO1915-01 Pressure Rating 1,450 psi
- Also suitable for underground



F-SERIES TWIN PEDESTAL HD OIL REEL

FHXO1915-01

- Hose Size 3/4"x 15m
- Hose Type Oil
- Pressure Rating 1,250 psi





F-SERIES DIESEL REELS FCD2515-01 1" X 15M FCD3815-02 1 1/2" X 15M

- Strong heavy duty cradle frame construction
- FCD2515-01 Pressure rating 1,000 psi
- FCD3815-02 Pressure rating 500 psi

BOP BATTERY OPERATED PUMP

BATTERY OPERATED PUMP

Simple yet clever, the BOP is a portable, rechargeable, 18V battery operated oil pump, designed to improve workshop efficiency & reduce workshop fatigue inherent with operating manual oil pumps.













BOP INLINE METER IM012EB-01

- Operating Temp: -20°C to 70°C
- Operating Pressure: 20 psi (MAX 60 psi)

Product	Contents	Product Code	
20L Starter Kit	Pump Stem, Power Head, Hose & Gun assembly, Battery Pack and Charger	BP20S-UNA	
20L Pump Stem Kit	Pump Stem, Hose & Gun assembly	BP20X-UNA	
60L Starter Kit	Pump Stem, Power Head, Hose & Gun assembly, Battery Pack and Charger	BP60S-UNA	
60L Pump Stem Kit	Pump Stem, Hose & Gun assembly	BP60X-UNA	
Inline Meter	BOP Inline Meter, Fittings & Battery	IM012EB-01	
Power Head	Battery Operated Power Head to suit Pump Stem	BP20-PH	
Battery	18V 2.0Ah Rechargeable Battery	BPB-20AH	
Charger	Charger suited for 2.0Ah Battery	BPC-A	



HEAVY-DUTY SOLUTION

R-SERIES RATIO AIR OPERATED OIL PUMP

The 'R' Series range of pumps have been designed and manufactured using a strong metal construction, providing maximum performance and long service life. All the 'R' Series pumps are supplied complete with an inline air lubricator to help prevent premature wear. R100 suitable for oils up to SAE90. R300 / R500 / R1000 suitable for oils up to SAE140. The ideal choice for remote mount or integration into lubrication systems.



Long Service Life

Supplied with In-line lubricator to prevent excess wear and extend service life

Air Inlet (1/4"NPT)

Robust and Durable Design

Heavy duty aluminium and steel air motor construction

Sliding Bung Adaptor (2"BSP)

on all R-Series pump models



Maximize Performance Life

Large exhaust ports integrated to prevent icing

Heavy Duty Construction

For long reliable service life

Oil Outlet (3/4"BSPT or NPT)

For all R-Series pump models

Pressure Relief Valve

On 5:1 ratio pumps only

Oil Inlet (1"BSPT or NPT)

On all stub pump models

Part Number	R100T-01	R300S-01	R300T-01	R500S-01	R500T-01	R1000S-01	R1000T-01
Description	Drum Pump	Stub Pump	Drum Pump	Stub Pump	Drum Pump	Stub Pump	Drum Pump
Pump ratio	1:1	3:1	3:1	5:1	5:1	10:1	10:1
Output SAE 10	60L/min	23L/min	23L/min	32L/min	32L/min	1 8L/min	18L/min
Output SAE 15W-40	45L/min	19L/min	19L/min	30L/min	30L/min	17L/min	17L/min
Output SAE 90	43L/min	18L/min	18L/min	28L/min	28L/min	15L/min	15L/min

Note: The above flow rates free flow from the pump

INDUSTRIAL

FLOW METERS

Macnaught MX-SERIES & M-SERIES positive displacement meters offer flexibility and robust design for superior performance and reliablity.

The **MX-SERIES** offers a range of readily interchangeable pulse and direct mountable digital displays for a wide range of flow applications.

The **M-SERIES** range are available with reliable mechanical displays, offering a measurement option for unpowered or remote sites.

- Fuel transfer
- Oils & Lubricating Fluids
- Food Processing & Batching
- Chemical & Pharmaceutical

Supplied with an individual test report, Macnaught MX & M Series Flowmeters are Engineered and manufactured to the highest precision out of our facility in Australia



EQUIPMENT **WASTE OIL**













EVACTR-MC • 3/4" Diaphragm Pump

MOBILE OIL

- Heavy duty TR205 drum trolley

EVACUATION SYSTEM

- 4 way valve complete with hoses and fittings
- Portable/mobile quality system designed for filling or removal of oil or waste oil from tanks/bulk containers
- 205L drum not included



IDEAL FOR MOBILE WASTE EVACUATION APPLICATIONS

TRUCK WASTE **OIL DRAINERS 110L**

L-TOD110P

- Low level oil drainer with swivel castors for easy movement
- Large 110L capacity

For Warranty Terms & Conditions see au.macnaught.com/warranty



GET IN TOUCH



AU CUSTOMER SERVICE 1800 185 102 orders@macnaught.com.au



NZ CUSTOMER SERVICE 0800 023 510 nzorders@macnaught.com.au



CONNECT WITH US!

