

FUEL FILTER HA, GB, VA

Thank you for purchasing a Macnaught Fuel Filter.



Please read and retain this instruction sheet to assist you in the operation and maintenance of this quality product. Take particular note of all warnings and safety messages.



Features

Your Macnaught Bowl-Type Fuel Filter utilises a replaceable 10µm paper element, contained within a “See-Thru” weather resistant bowl.

Each unit is manufactured with a Zinc die-cast body, nitrile rubber gasket and a polycarbonate transparent filter bowl - with drain tap. The die-cast body has 1” BSP (F) inlet and outlet threads, and has a maximum working pressure of up to 150 psi (1033 kPa).

The Fuel filters are suitable for use with Diesel fuel, Petrol and Methanol. If other fluids are to be filtered, please consult your Macnaught Distributor.

Important Notes

WARNING

DO NOT USE TEFLON TAPE ON THESE FILTER ASSEMBLIES



Handling flammable liquids is hazardous. There is the potential for an explosion and/or fire. Your personal safety, and the safety of others are at risk. It is your responsibility to know and follow all safety precautions when handling flammable liquids & ensure all equipment operators have adequate instructions concerning safe procedures.

Follow all recommended safety precautions when handling flammable liquids such as petrol.

IMPORTANT

The filter bowl should be hand tightened only

Pumps

HP LITRESTROKE™ -
GT RAPIDFLO™ -
RVP ROTARY VANE PUMP -

Filter Kits




USE HA-01
USE VA-01
USE VA-01

Older Models



GP RAPIDFLO™ - USE GB-01

ASSEMBLY

HP LITRESTROKE™ (HA-01)



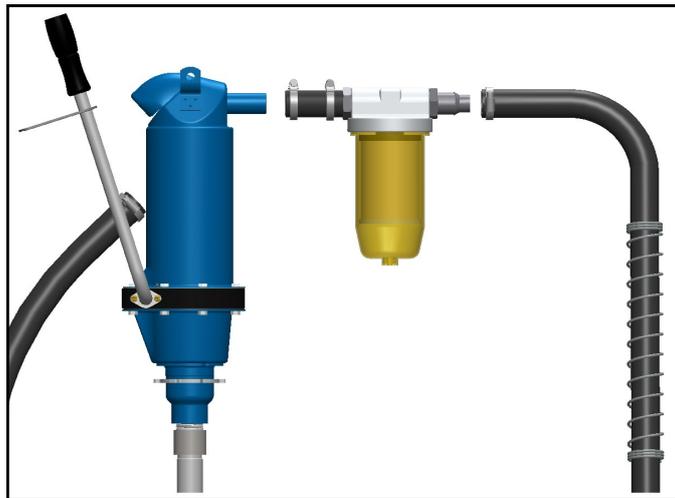
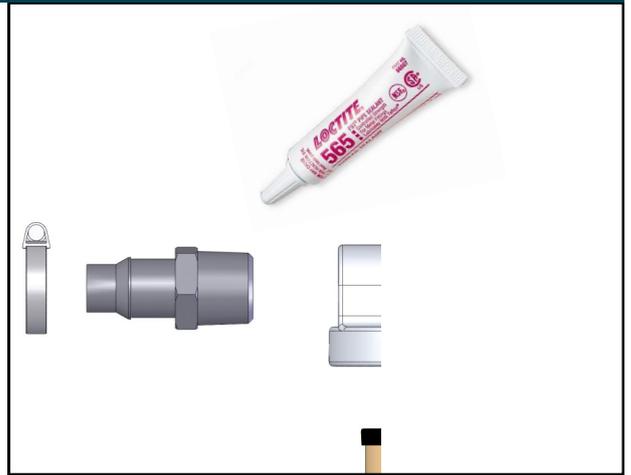
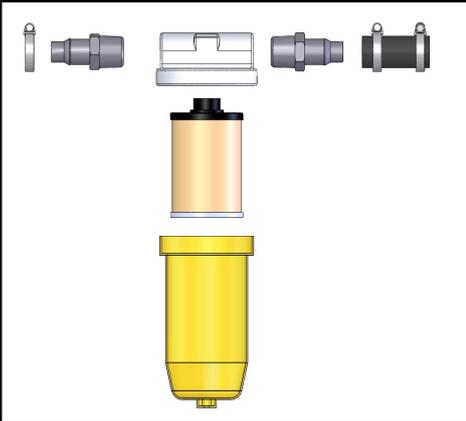


GP RAPIDFLO™ (GB-01)

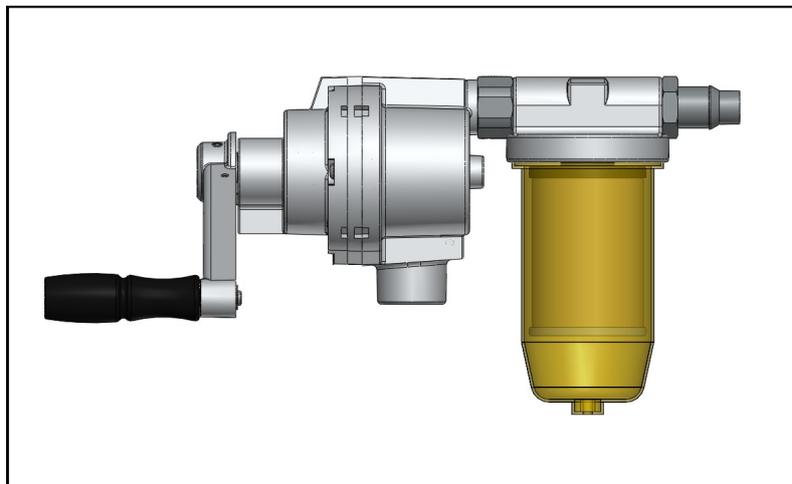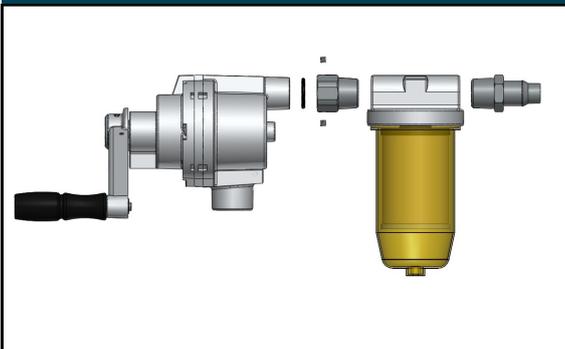

ASSEMBLY
RVP (VA-01)

GT RAPIDFLO™ (VA-01)

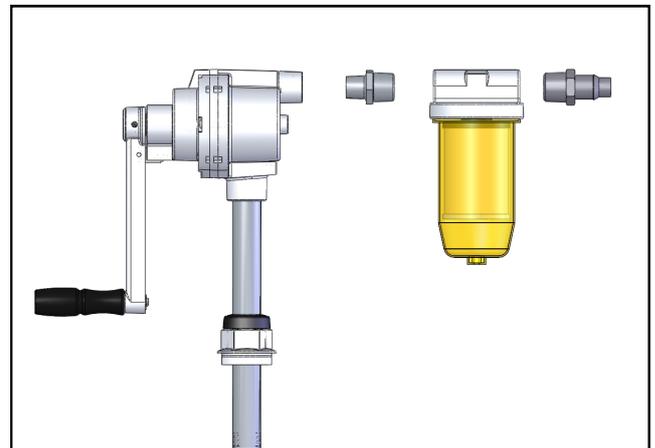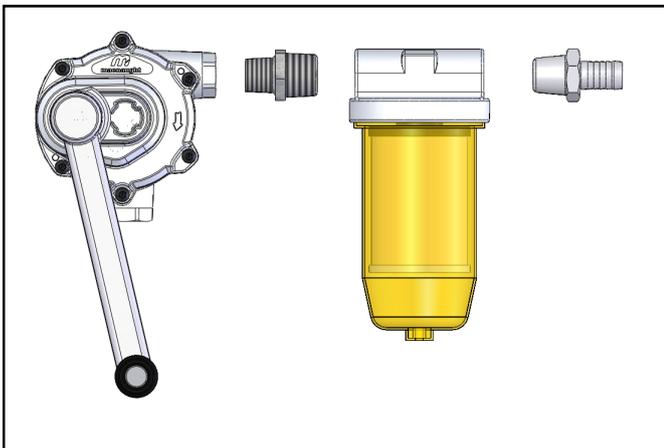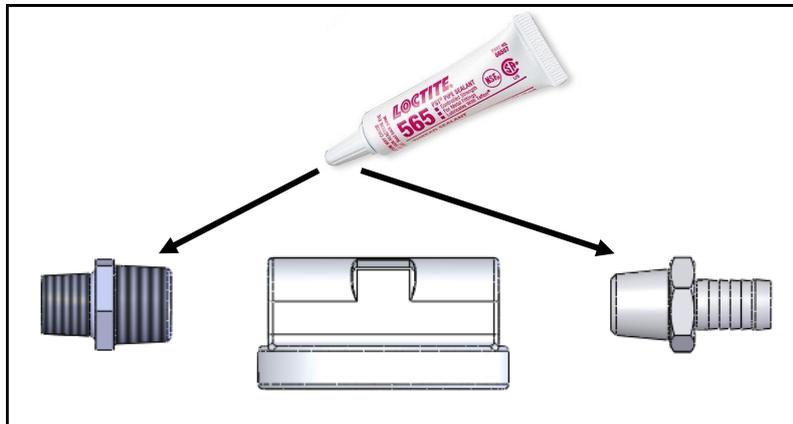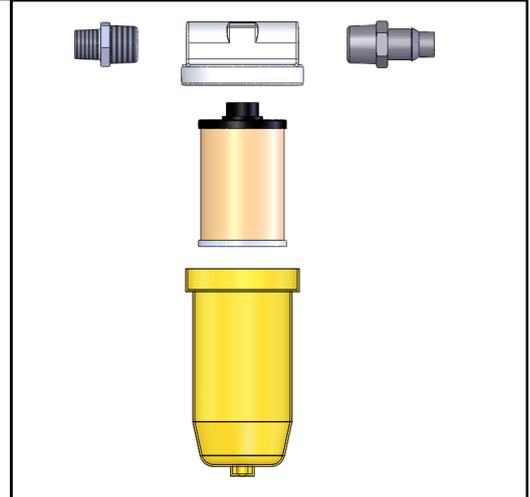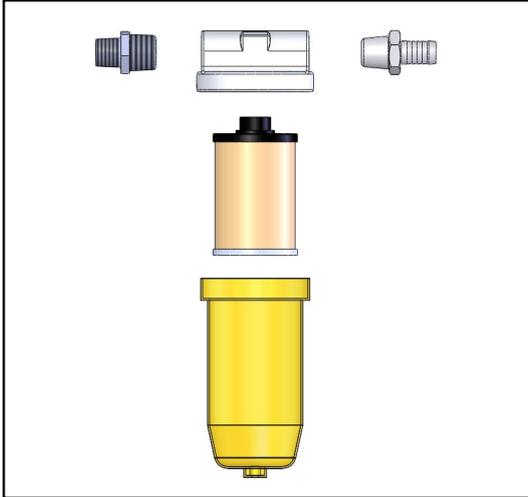

For Warranty Terms and Conditions see macnaught.com.au



Macnaught Pty Limited
ABN 66 000 075 785

41-49 Henderson Street
Turrella NSW 2205 Sydney Australia
Postal Address PO Box 90
Amcliffe NSW 2205 Sydney Australia

T: +61 2 9567 0401
F: +61 2 9597 7773
W: www.macnaught.com.au